


SIPL[®]

Trusted Tools



LUBRICATION EQUIPMENT



2025



S-1007

Lever Type Grease Gun - Economy Model

SIPL[®]
Trusted Tools

- Sturdy construction deigned for use in daily maintenance work.
- Suitable for use of 14oz grease cartridge or 500gms bulk fill.
- Best for Industrial, Agricultural and Automotive applications.
- Air can be released by half turn of the head assembly.
- Produces pressure 6000 psi.
- Available with 6" crank tube or 12" flex hose & 4 jaw coupler.
- Aluminium Die Cast Head.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10



**S-1010
AT**

Lever Type Grease Gun - Medium Duty



- Available in aluminium die cast head.
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 8000 psi.
- Suitable for use of 14oz grease cartridge or 500 gm bulk fill.
- Duly fitted with filler nipple.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10



Aluminium T-Handle

**S-1010
NT**

**Lever Type Grease Gun - Medium Duty
With Heavy Head - Fitted With Nylon T-Handle**

SIPL[®]
Trusted Tools

- Available in aluminium die cast head.
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 8000 psi.
- Suitable for use of 14oz grease cartridge or 500 gm bulk fill.
- Duly fitted with filler nipple.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10



**S-1010
NTF**

**Lever Type Grease Gun - Medium Duty
Nylon T-Handle**



- Available in aluminium die cast head.
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 8000 psi.
- Suitable for use of 14oz grease cartridge or 500 gm bulk fill.
- Duly fitted with filler nipple.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10
- Duly fitted with 12" flexible hose.



Nylon T-Handle

**S-1010
A**

Lever Type Grease Gun

SIPL[®]
Trusted Tools

- Available in aluminium die cast head.
- Air can be released by half turn of the head assembly.
- Produces pressure 8000 psi.
- Suitable for use of 14oz grease cartridge or 500 gm bulk fill.
- Knurled barrel for easy grip.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10



S-1011

Lever Type Grease Gun - Heavy Duty



- Heavy duty aluminium die cast head fitted with filler nipple and air release valve.
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 10000 psi.
- Available with 6" crank tube & heavy duty 4 jaw coupler.
- Suitable for use of 14oz grease cartridge or 500gms bulk fill.
- Knurled barrel for easy grip.
- Short stroke for ease of use in confined areas.
- Variable stroke type.




**S-1011
A**

Lever Type Grease Gun - Heavy Duty

SIPL[®]
Trusted Tools

- Heavy duty aluminium die cast head fitted with filler nipple and air release valve.
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 10000 psi.
- Available with 12" flex hose & heavy duty 4 jaw coupler.
- Suitable for use of 14oz grease cartridge or 500gms bulk fill.
- Knurled barrel for easy grip.
- Short stroke for ease of use in confined areas.
- Variable stroke type.

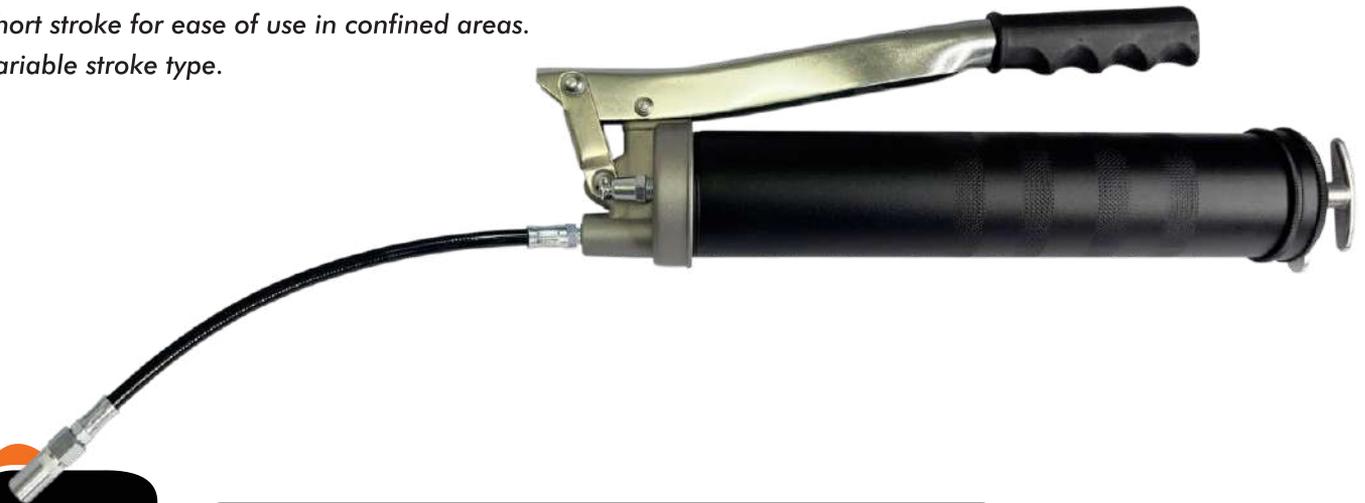

S-1012


Pistol Type Grease Gun - Economy Model Single Port

- Knurled barrel for easy grip.
- Suitable for use of 14oz standard cartridge or 500 gm bulk fill.
- Duly fitted with 6" fixed spout and 4 jaw coupler.
- Matt black powder coated finish.
- Air can be released by half turn of the head assembly.
- Produces pressure 5500 psi.

Aluminium Die Cast Head



Knurled Barrel For Easy Grip

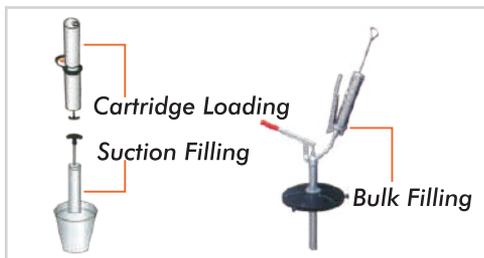

Available With Aluminium T-Handle

Available With Delta Handle

**S-1012
A**

**Pistol Type Grease Gun - Economy Model
Flexible Hose (Single Port)**



- Knurled barrel for easy grip.
- Suitable for use of 14oz standard cartridge or 500 gm bulk fill.
- Duly fitted with 12" Nylon hose and 4 jaw coupler.
- Matt black powder coated finish.
- Air can be released by half turn of the head assembly.
- Produces pressure 5500 psi.



Available With
Aluminium T-Handle




Available With
Delta Handle

**S-1012
DP**

**Pistol Type Grease Gun
Heavy Duty (Double Port)**



- Knurled barrel for easy grip.
- Suitable for use of 14oz standard cartridge or 500 gm bulk fill.
- Matt black powder coated finish.
- Air can be released by half turn of the head assembly.
- Produces pressure 5500 psi.

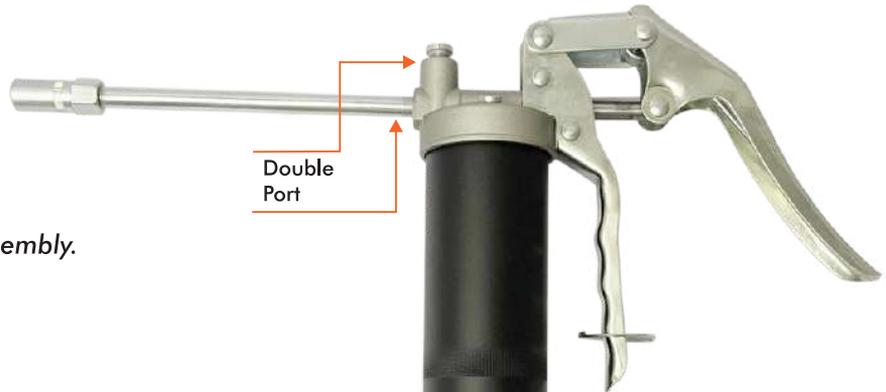

Double
Port



Available With
Aluminium T-Handle



Available With
Delta Handle

S-1012 DPA

Pistol Type Grease Gun - Heavy Duty Flexible Hose (Double Port)

- Knurled barrel for easy grip.
- Suitable for use of 14oz standard cartridge or 500 gm bulk fill.
- Duly fitted with 12" Nylon hose and 4 jaw coupler.
- Matt black powder coated finish.
- Air can be released by half turn of the head assembly.
- Produces pressure 5500 psi.




Available With
Aluminium T-Handle

Available With
Delta Handle

S-1013

Pistol Type Grease Gun Extended Handle

- Professionally designed extra long handle for high pressure.
- Duly fitted with variable stroke device.
- Generates pressure of 7000psi.
- Also available with Heavy duty zinc T-handle.
- Air can be released either through filler nipple or by half turn of the barrel assembly

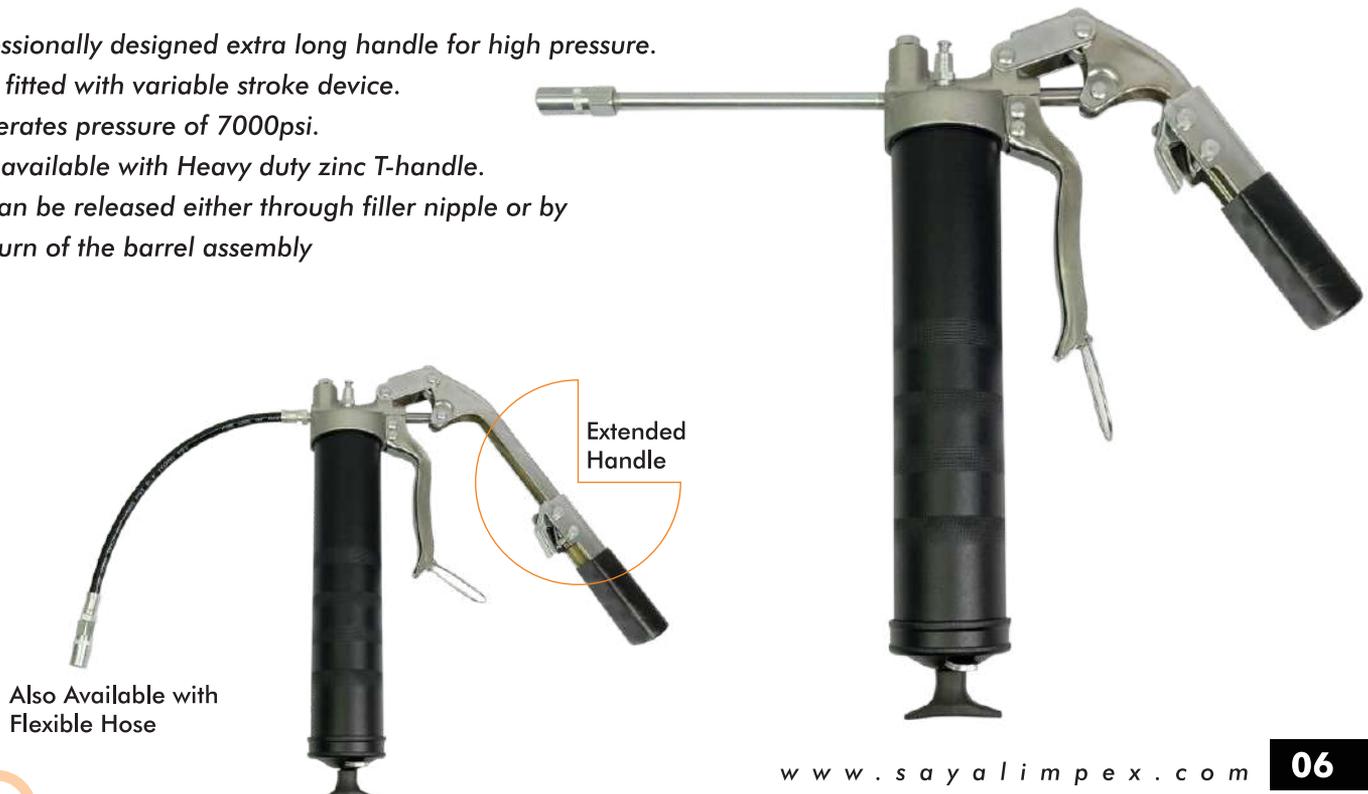

Also Available with
Flexible Hose

S-1014

**Mini Pistol Type Grease Gun
Economy Model**

SIPL[®]
Trusted Tools

- One hand operated mini pistol gun.
- Suitable for use of 3oz grease cartridge.
- Black Powder coated finish.
- Produces pressure upto 3500 psi.



**S-1014
DT**

**Midget Pistol Grease Gun
Deluxe Type**

- Single hand operated midget pistol grease gun fitted with aluminium die cast head.
- Suitable for use of 3oz grease cartridge.
- Available in 6" crank tube or 6" flexible hose and 4 jaw coupler.
- Black Powder coated finish.
- Crank tube can be attached on two sides of the head as per suitability, 90° of barrel or 180° of the barrel.
- Produces pressure 4000 psi.



**S-1014
A**

Midget Pistol Grease Gun American Type

SIPL[®]
Trusted Tools

- Single hand operated midget pistol grease gun fitted with aluminium die cast head.
- Suitable for use of 3oz grease cartridge.
- Available in 6" crank tube or 6" flexible hose and 4 jaw coupler.
- Glossy black finish.
- Crank tube can be attached on two sides of the head as per suitability, 90° of barrel or 180° of the barrel.
- Produces pressure 4000 psi.



Also Available with
Flexible Hose

S-1015

Lever Type Grease Gun

- Heavy duty 1.2mm thick barrel.
- Robust sheet handle
- Suitable for 14oz standard cartridge.
- Pressure 10000 psi.
- Fitted with 6" fixed spout & 4 jaw coupler.




**S-1015
A**

Lever Type Grease Gun - Flexible Hose

SIPL[®]
Trusted Tools

- Heavy duty 1.2mm thick barrel.
- Robust sheet handle
- Suitable for 14oz standard cartridge.
- Pressure 10000 psi.
- Fitted with 12" nylon hose & 4 jaw coupler.

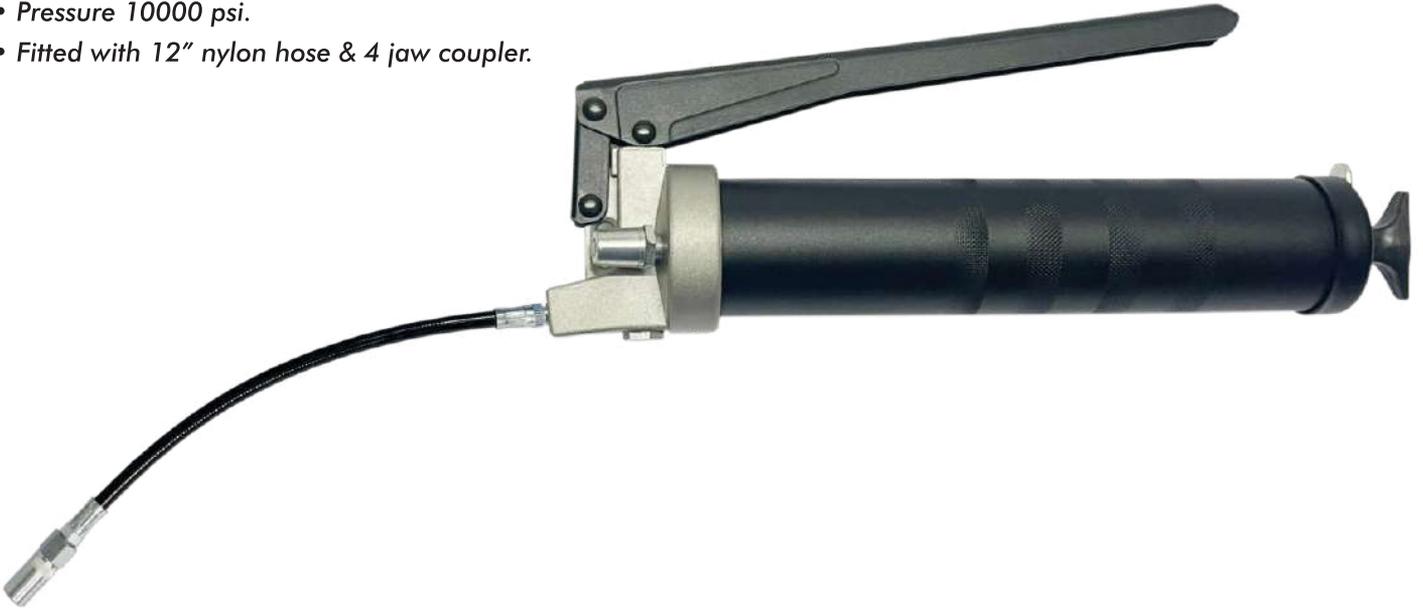

S-1016

Lever Type Grease Gun - Extra Grip



- Heavy duty polished aluminium die cast head.
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 8000 psi.
- Suitable for use of 14oz grease cartridge or 500 gm bulk fill.
- Duly fitted with filler nipple.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10
- Heavy duty sleeve on barrel for firm grip.



S-1017

Suction Gun

- Rugged transfer gun designed for use with gear oil to get them both in and out of gear box.
- Needs no priming.
- Matt black powder coated barrel.
- Supplied with 12" flexible vinyl hose.
- Capacity 16oz.


SIPL[®]
Trusted Tools



S-1018

Transfer Pump Model

- Simple design and precise construction makes it very useful for both industrial and DIY application.
- Supplied with 8 feet vinyl hose for suction and discharge.
- Suitable for use of fuel oil, Antifreeze, brake fluids, petrol and cooling liquids.
- Pump has dual operation. It draws in and pump out in single operation.
- Mat black powder coated barrel with Zinc plated steel head.
- Capacity 16oz.

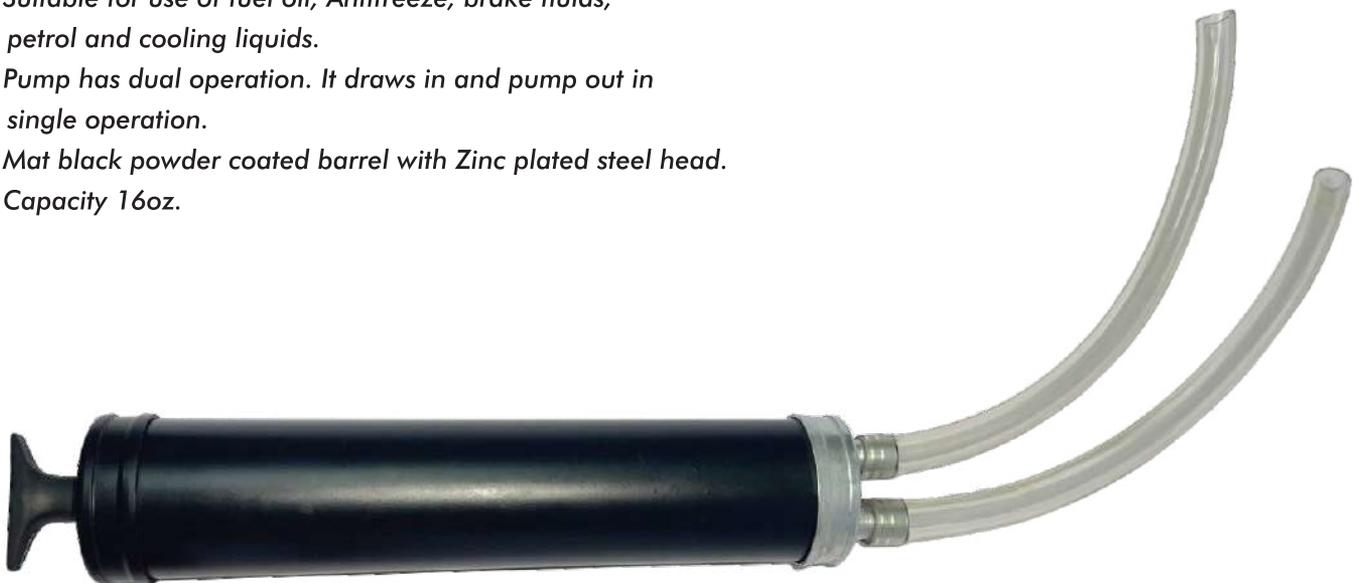

S-1019

Lube Lever Type Grease Gun

SIPL[®]
Trusted Tools

Lever type lube grease gun is designed to allow complete use of lubricating grease without leaking grease onto equipment & tools. Lube lever grease gun keeps grease spills and leaks away from machine and shop surfaces.

- Premium quality leak-free construction.
- Durable zinc-plated steel barrel.
- Pressure Cap. 300bar/ 4350psi.
- Cartridge screw directly into grease gun head making it quicker and cleaner than standard cartridge.



S-1020

Pistol Grip Lube Grease Gun



- One hand pistol grease gun with zinc plated steel barrel for lube grease gun.
- Available with rigid tube or high-pressure nylon hose.
- Pressure cap.250 bar / 3625 psi.
- Cartridge screw directly into grease gun head making it quicker and cleaner than standard cartridge.



S-1021

Mini Lever Type Grease Gun

SIPL[®]
Trusted Tools

- Capacity 8oz.
- Matt Black Finish.
- Available with 6" Crank Tube or 12 Flex Hose
Duly Fitted with Coupler.
- Produces Pressure 4000 PSI.



S-1022

**Lever Type Grease Gun
Graded Cast Head**

- Heavy Graded cast iron head.
- Suitable for use of 14oz grease cartridge or 500 gm bulk fill.
- Knurled barrel for easy grip.
- Air can be released by half turn of the head assembly.
- Produces pressure 10000 psi.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10
- Also Available with 12" Nylon Hose.




Also Available with
Flexible Hose



S-1023

**Pistol Grip Grease Gun
Variable Stroke Professional Series**

- One hand operated pistol grease gun comes with advanced features for professional use.
- Suitable for 14oz grease cartridge or 500 gm bulk fill.
- Duly fitted with 6" crank tube or 12" flexible hose and 4 jaw coupler.
- Heavy duty aluminium die cast head fitted with filler nipple.
- Produces pressure 6000 psi.
- Threads available in : 1/8 BSPT, 1/8 NPT or M10

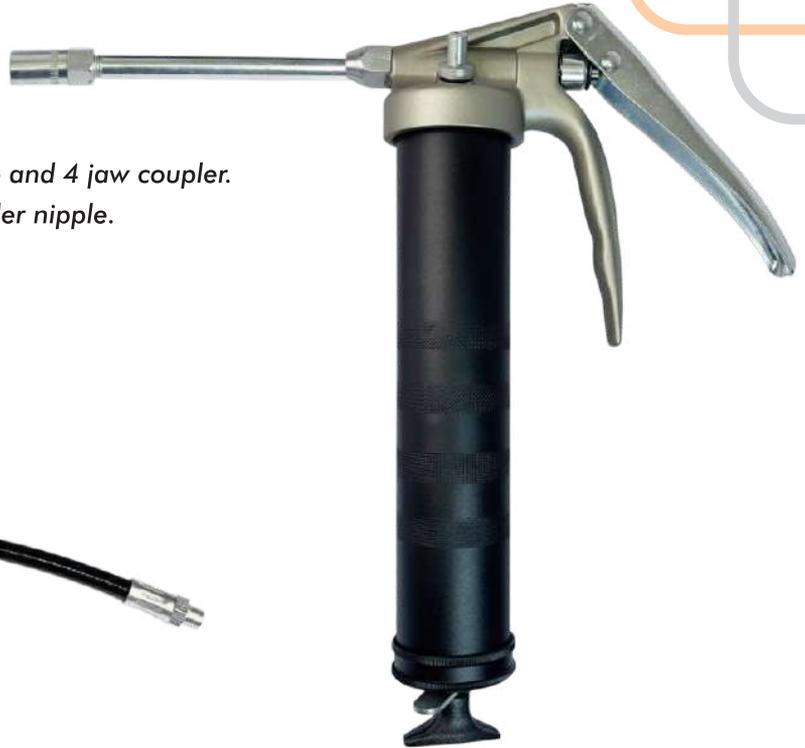


Also Available with Flexible Hose

S-1024

Push Type Grease Gun

- Matt black powder coated body.
- Available with pointed nozzle, universal nozzle or with 4 jaw coupler.
- Suitable for use of bulk grease.
- Available in capacity - 4oz or 8oz



S-1025

Push Type Grease Gun - Made Of Plastic

SIPL[®]
Trusted Tools

- Available with pointed nozzle, universal nozzle or with 4 jaw coupler.
- Suitable for use of bulk grease.
- Available in capacity - 4oz or 8oz



S-1028

Double Lever Grease Gun



- Heavy duty aluminium die cast head & super strong double handed grip.
- Double lever grease gun suitable for quick effortless high pressure applications.
- Develops 5000psi / 345bar.
- PVC cap for holding hose when not in use.
- Available with 12" nylon flexible hose or with fixed spout 6" fitted with 4 jaw coupler.



S-1030

Double Piston Grease Gun

SIPL[®]
Trusted Tools


- Heavy duty aluminium die cast head fitted with filler nipple and air released valve .
- Air can be released either through filler nipple or by half turn of the head assembly.
- Produces pressure 10000psi.
- Available with 6" prank tube or 12" flex hose and heavy duty 4 jaw coupler.
- Suitable for use of 14oz grease gun cartridge or 500gms bulk fill.
- Knurled barrel for easy grip.



S-1031

Heavy Duty Lever Handle Grease Gun With Polycarbonate Tube

- Heavy Duty Lever Handle Grease Gun with polycarbonate tube with aluminium casted adapters both sides.
- Suitable for use of 14oz standard cartridge or bulk fill 500gms.
- Heavy duty graded aluminium die cast head.
- Comes with 6" (150mm) steel spout or 12" (300mm) flexible hose duly fitted with 4 jaw coupler.
- Variable stroke grease gun for use in confined space.
- Develops 10000 PSI.
- Die cast head duly fitted with air release valve and filler nipple.

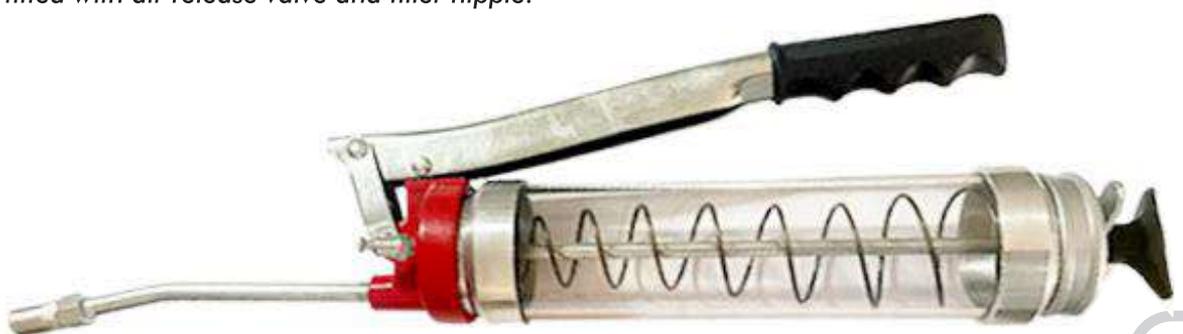

S-1032

Pistol Type Grease Gun With Polycarbonate Tube

SIPL[®]
Trusted Tools

- Pistol type grease gun with polycarbonate tube with aluminium casted adapters both sides.
- Heavy Duty Graded aluminium die cast head.
- Suitable for use of 14oz standard cartridge or bulk fill 500gms.
- Comes with 6" (150mm) steel spout or 12" (300mm) flexible hose duly fitted with 4 jaw coupler.
- Develops pressure 5000 PSI.
- Die cast head duly fitted with air release valve and filler Nipple.



Also Available with Flexible Hose



S-10416A

Hand Operated Tyre Sealant Pump



- Pumps tire sealant directly into tubeless tires.
- Dispenses approximately 1-gallon per 16 lift strokes.
- Adjustable collar allows the user to control the amount of sealant dispensed per stroke by changing the stroke length.
- Quick connect valve stem coupler.
- Designed to fit 5-6 ½ gallon pails.
- Powder coated cover.
- Return valve.
- 5' vinyl hose.

S-10355

Lever Action Pump Professional

SIPL[®]
Trusted Tools



- Head and bung nut is made of pressure aluminium die casting.
- Supplied with bend spout and telescopic pipe.
- Main body of pump is in powder coated finish.
- Fits to 55 gallons (205 liters) barrel.
- Delivery Rate 1 Gallon Per 9 Strokes.

S-10356

**Plastic Pump For
Handling Chemicals**



S-10356

S-10357

**Lever Action Pump
(For Anti-Freeze)**



Also
Available With
Graded Plastic
Telescopic Pipe

Telescopic
Pipe

S-10357

S-10357-A

- All plastic rotary pump superior chemical resistant and effortless operation pump.
- Comes complete with 1" discharge spout and 2" NPT polythene adopter.
- Suitable for trouble free dispensing of petroleum products, water and water based chemicals, many acid and alkali solutions.
- Ryton construction perfect for especially troublesome "dry" chemicals.

- The pump is specially designed for pumping anti-freeze, petroleum based materials & other non corrosive liquids.
- The pump is not intended for use with corrosive liquids, gasoline etc.
- The main body of the pump is made of Steel.
- Pump is supplied with curved dispensing spout & telescopic tube



Rotary Pumps



S-301

Stainless Steel Hand Rotary Pump

- This body & bung adapter are made of stainless steel.
- Fits to 15-55 gallon drum.
- Handle, bend spout, 3 Pcs suction tube, 2" bung adapter are made of stainless steel material.
- This pump can be used for acids, chemicals, thinner, urea DEF and petroleum based liquids.



S-302

Aluminium Rotary Pump

- Aluminium hand operated pump is suitable for pumping out petroleum products and oils, non corrosive fluids of light to medium viscosity from drums.
- Featuring LIGHT WEIGHT construction, easy installation and operation as well as durability.
- Seals are made of nitrile rubber.
- Fits to 205 litre barrel
- Comes complete with aluminium pipe on suction and aluminium bend on delivery side.
- Red bung nut fitted with suction tube.



Hand Operated Lever Pumps



S-401

- Polypropylene construction.
- Stainless steel rod.
- 350ml to 430ml per stroke.
- Telescopic suction tube.
- Suitable for non-corrosive liquids such as diesel, light oil, low viscosity lubricants.
- Also suitable for anti-freeze, alcohols, water based chemicals and alkaline solutions.



S-402

- Polypropylene construction.
- Chrome plated steel rod.
- 270ml to 400ml per stroke.
- Telescopic suction tube.
- Suitable for lubricants, alcohol and fuel oils.



S-403

- PPS construction.
- Stainless steel rod.
- Polypropylene seal.
- Suitable for all fuel oils, stronger acid, alkali, 20% nitric acid.



Hand Operated Pumps



S-10411
Polypropylene
Lever Pump

- Polypropylene and polyethylene construction.
- Suitable for 15-55 gallon drum.
- 2" bung adapter with locking nut.
- Includes 1" x 6 feet hose.
- It dispenses 1 pint per stroke.
- Suitable to be used for mild detergents, oil based lubricants, water based fluids, DEF and windshield washer fluid & DEF.



S-10412
Syphon Pump
Bulb Type - Long Pipe

- Designed to fit 15-55 gallon containers.
- 1" inlet tube and 1" outlet hose.
- Polyethylene body & suction tube polypropylene.
- Siphons 7 gallon per minute.



Hand Operated Pumps



S-10413

- Telescopic suction tube fits 15 to 55 gallon container.
- Includes curved spout & bend spout. It dispenses 1 Ltr. per stroke.
- Smooth operated pump with die cast head.
- Ideal for use of high viscosity liquids, such as paraffin, gear oil etc.



S-10414

Manual Fuel Pump

- Manual diaphragm pump.
- It dispenses 1 gallon in 8 strokes.
- Suitable for 15-55 gallon drum.
- Aluminium die cast body.
- 8 feet rubber hose with aluminium nozzle.
- Telescopic suction tube.



S-10415

Chrome Plated Lever Pump

- Chrome plated pump for non-water based and non-corrosive liquids, useful for antifreeze light weight lubricants, fuel voils.
- Telescopic suction tube.
- 2" or 1½" NPT bung nut.
- It dispenses 1 gallon 10 strokes.
- Suitable for 15-55 gallon drum.

S-10351**Hand Rotary Pump****S-304****High Flow Pump**

Available as spare 6 feet hose with 2 hose clamps with metal bend spout on one end.

S-10351**S-10351 A****S-304**

- Heavy duty rotary pump transfers non corrosive fluids of light to medium viscosity.
- Seals are made of nitrile rubber.
- Fits to 205 litre barrel.
- Comes complete with ERW pipe zinc plated on suction and zinc plated or coloured on delivery side.
- 2" bung nut fitted with suction tube.
- Cast iron vanes precisely machined are fitted in pump housing for smoother delivery.

- One Liter Per Rotation And 100 Liters Per Minute.
- Vertical Conveyor
- Distance : 50m

Cat No.	Size	Description	Suction Tube	STD. Packing
S-10351	1"	Standard	Rigid	4
S-10352	3/4"	Standard	Rigid	4
S-10351T	1"	Standard with Flexible hose 1 meter	Telescopic Pipe	4
S-10352T	3/4"	Standard with Flexible hose 1 meter	Telescopic Pipe	4
S-10356	1"	Standard	Telescopic Pipe	4



Battery Operated Fuel Pumps



SBFT-02

Battery Requirement:

6 Aa Or 2 D Batteries

Suction Hose:

17" X 0.8" Diameter

Outlet Hose:

39" X 0.8" Diameter

Flow Rate Approximately:

2.4 Gal / Min

Additional Accessories:

Battery Converter Device2

Compatible Fluids:

- Petrol
- Water
- Oil
- Other Non-corrosive Liquid



SBFT-03

Simple Dispensing: Press the on button and watch dispensing begin. Press the off button to stop.

Versatility: For use with gasoline, diesel, kerosene, light weight oils and non-potable water.

Fast and Efficient Delivery: Delivers at 2.4 Gallons Per Minute.

Use with a Variety of Cans: The integrated threads work on the majority of the fuel cans in North America.

Built with Safety in Mind: Features an auto shut-off sensor to prevent overfilling.

Specifications:

- Dispensing Hose Length – 39 inches
- Suction Hose Length – 18.5 inches
- Flow Rate: 2.4 GPM
- Runs on 4 x AA batteries (not included)
- Can run on 2 x AA batteries in the event of an emergency



SBFT-04

specifications:

- Operates on (2) "D" size alkaline batteries
- Pumps approximately 250 gallons before requiring new batteries
- Flow rate up to 2.6 GPM @ 2.5 PSI
- Includes 39.4" long hose
- Suction tube length: 15.2"NBR seals

Recommended For:

- Gasoline
- Kerosene
- Diesel
- Light oils

S-10362

Bucket Grease Pump



- High pressure hand operated portable grease pump.
- Generate volume grease where power is not available or where an air operated grease pump can not be afforded and high pressure grease is required.
- Useful for clean greasing of trucks & machinery.
- Bucket pump has heavy duty aluminium die cast head and solid steel pump chamber.
- Comes complete with 2 meter of high pressure hose fitted with accessories.



**Bucket Grease Pump
(Mounted On Trolley)**



Bucket Grease Pump

MODEL NO. WITHOUT TROLLEY	MODEL NO. WITH TROLLEY	CAPACITY	STANDARD PACKING
SBGP-5	SBGPT-5	5 Kg	1 Pc
SBGP-10	SBGPT-10	10 Kg	1 Pc
SBGP-15	SBGPT-15	15 Kg	1 Pc
SBGP-20	SBGPT-20	20 Kg	1 Pc

**SFOGP-
10**

Foot Operated Bucket Grease Pump

- High pressure foot operated portable grease pump.
- Generate volume grease where power is not available or where an air operated grease pump can not be afforded and high pressure grease is required.
- Useful for clean greasing of trucks & machinery.
- Pump can be operated by a single person and can be used with low cost bulk grease.
- Duly fitted with 2 meters high pressure rubber hose and 4 jaw coupler.
- Capacity 10 kg / Pressure 6000 psi / Output 2 gms per stroke.



**S-10103
S-10104**

**Oil Cans Perfetto Type
Steel Pump Mechanism**



- Perfetto type oil cans has dome shaped body.
- Oil cans are available in both steel pump mechanism & in brass pump mechanism.
- Body of oil can is drawn from tin coated sheet heavy gauge, and has powder coated finish.
- The pump mechanism is fitted with two steel balls for large volume delivery in each stroke.
- The suction tube at bottom of pump is without spring, which prevents malfunctioning because of sticking valve due to thick oil.



S-10103



S-10104

Model No. Flexible Spout	Model No. Rigid Spout	Capacity	Spout Size	Std. Packing
S-10103	S-10104	200 cc	5" (125mm)	100
		300 cc	6" (150mm)	100
		400 cc	6" (150mm)	100
		500 cc	7" (175mm)	100
		700 cc	8" (200mm)	60
		1000 cc	8" (200 mm)	48

**S-10105
S-10106**

High Pressure Metal Oil Cans Wesco Type

- Body of oil can is drawn from tin coated sheet heavy gauge and has powder coated finish.
- Oil cans are available in both steel pump mechanism & in brass pump mechanism.
- The pump mechanism is fitted with two steel balls for large volume delivery each stroke.
- The suction tube at bottom of pump is without spring, which prevents malfunctioning because of sticking valve due to thick oil.



S-10105



S-10106

Model No. Flexible Spout	Model No. Rigid Spout	Capacity	Spout Size	STD. Packing
S-10105	S-10106	1/4 pint	5" (125mm)	100
		1/2 pint	6" (150mm)	100
		3/4 pint	6" (150mm)	100
		1 pint	7" (175mm)	100
		1.1/2 pint	8" (200mm)	60
		2 pint	8" (200mm)	48



Pistol Oiler Hand Operated Forced Feed

- Oil can body is drawn from tin coated sheet and has powder coated finish.
- Oil can pump mechanism is fitted with 2 steel balls for large volume delivery each stroke.
- Available in steel pump mechanism & brass pump mechanism.




MODEL NO.	CAPACITY	SPOUT SIZE	STD. PACKING
S-10107	125 cc	4" (100mm)	100
S-10108	150 cc	5" (125mm)	100
S-10109	180 cc	5" (125mm)	100
S-10110	500 cc	7" (175mm)	60

S-10360


Oil Filler Pump

S-10361

Grease Filler Pump

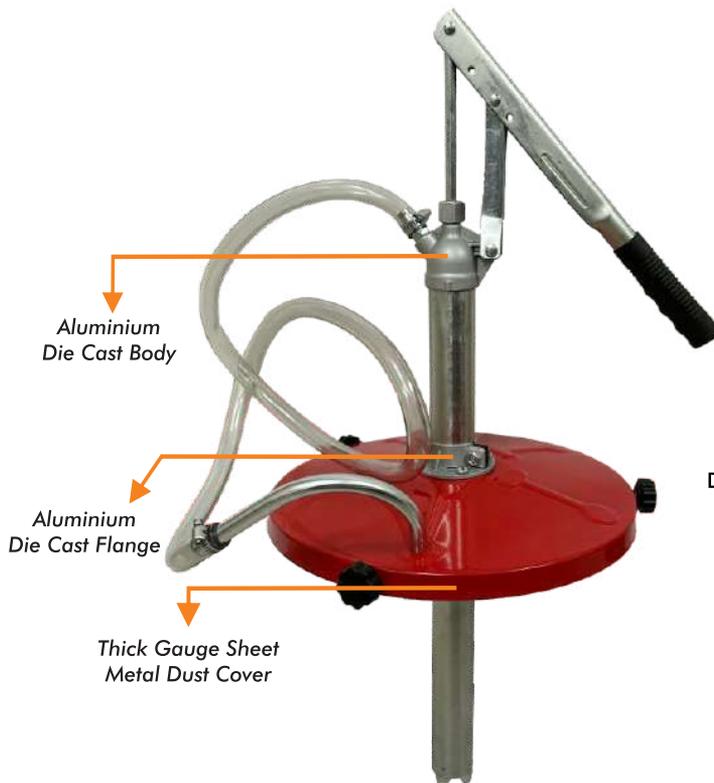

Oil Filler Pump

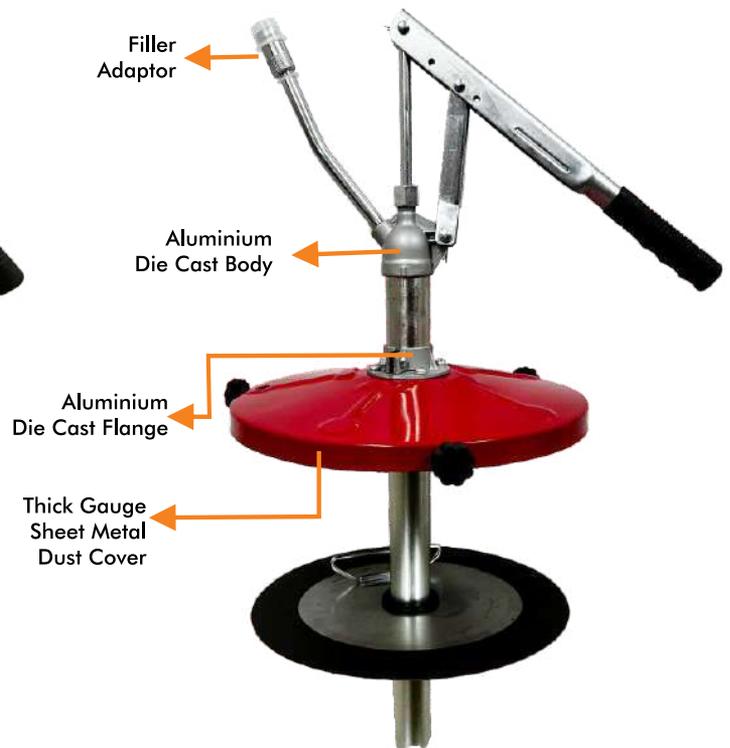

Grease Filler Pump

S-FF01

Fuel Filters




**S-FN01
S-FN02
S-FN03**

Fuel Nozzels



**Automatic Shutoff
Fuel Nozzels
S-FN01**

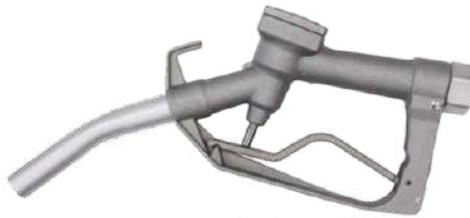

**Manual Shutoff
Curved Spout
S-FN02**



**Manual Shutoff
Straight Spout
S-FN03**

**S-1225
S-1213
S-1219**

Air Grease Lubricator Fitted With Hose & Control Gun



**Air Pressure: 6 To 8
Capacity: 13 Ltr.
S-1225**



**Air Pressure: 6 To 8
Capacity: 35 Ltr.
S-1213**



**Air Pressure: 6 To 8
Capacity: 50 Ltr.
S-1219**



Plastic Products



Measurers With Flexible Spout S-138

Capacity
1 Litre
2 Litre
3 Litre
5 Litre



Anti - Spill Funnels

Model No.	Funnel Size
S-136/6	6" Funnel
S-136/9	9" Funnel

- Heavy duty polyethylene funnel with filter and flexible spout



Garage Funnel



Locking Oil Funnel

3Pcs Plastic Funnels Set



Purpose: This funnel is used to transfer fluids like motor oil, diesel, petrol, and hydraulic fluids, especially from square or rectangular bottles, minimizing spills.

Features: It's made of heavy-duty polyethylene, often includes a filter to prevent debris from entering the equipment, and may have a wide spout for faster flow and reduced splashback.

Application: Commonly utilized in automotive settings, garages, and with agricultural or plant vehicles for clean and controlled pouring.

Plastic Mugs



S-1000

Capacity 1000 ml



S-500

Capacity 500 ml

S-BP01
S-BP02

Bearing Packer



S-BP01



S-BP02

Dock Bumpers And Wheel Chocks



S-DB01
Dock Bumpers



S-C01



S-C02



S-C03



S-C04



S-C05



S-C06



S-C07

Wheel Chocks



Oil Drain Pans & Drum Wrench



OP6L
Oil Pan - 6 L



OP15L
Oil Pan - 15 L With Anti-Spill
Feature Heavy Duty Model (Round)



OP9L
Oil Pan - 9 L
With Drip Tray (Square)



Tank Gauge



STG60:

Polypropylene Tank Gauge with a maximum length of 60"

STG72:

Polypropylene Tank Gauge with a maximum length of 72"

Additional Information:

• The Polypropylene Tank Gauge is ideal for measuring the remaining fluid in a tank without having to take off the bung cap and guess the depth of the fluid.

- 1.5" & 2" NPT threads

Recommended For:

- Gasoline
- Diesel
- Alcohol
- Ether
- DEF
- and most other chemicals

S-1040

Grease Nipples Straight or Angled



Straight



45° Bent



90° Bent

- Available in MM, UNF, NPT & BSP Thread
- Also Available Assorted in Box Packing.

**S-QRC
01**

Heavy Duty Quick Release Coupler



**Hardened
Jaws**

Upto 12000 PSI



S-10308
Seal Off Dispenser



S-10309
Pin Type Coupler



S-10302
Couplers 3 Jaw



S-10304
Couplers 4 Jaw



S-10311
Right Angle Coupler



S-10312
Swivel Coupler



S-10314
Button Head Connectors



S-10315
Needle Nose Dispenser



S-10316
Quick Connect Hose



S-10319
Needle Nose Connector



S-10321
Flexible Nylon Grease Hose



S-10322
Rubber Hoses



S-1249

Professional Bench Vice Fixed Base



Size

• 80mm • 100mm • 125mm • 150mm • 200mm

S-1250

Professional Bench Vice Swivel Base



Size

• 80mm • 100mm • 125mm • 150mm • 200mm

S-1251

Unigrip Machine Vice



Size

• 80mm • 100mm • 150mm

S-1231**Combination Spanner Elliptical Type
CRV Steel Chrome Plated Fully Polish**

Size (mm)	6	7	8	9	10	11	12	13
Size (SAE)	1/4	X	5/16	X	3/8	7/16	X	1/2

Size (mm)	14	15	16	17	18	19	20	21	22
Size (SAE)	9/16	X	5/8	11/16	X	3/4	X	13/16	7/8

Size (mm)	23	24	25	26	27	28	29	30	32
Size (SAE)	X	15/16	1"	X	1_1/16	1_1/8	X	X	1_1/4

**S-1232****Combination Spanner Press Panel
CRV Steel Chrome Plated**

Size (mm)	6	7	8	9	10	11	12	13
Size (SAE)	1/4	X	5/16	X	3/8	7/16	X	1/2

Size (mm)	14	15	16	17	18	19	20	21	22
Size (SAE)	9/16	X	5/8	11/16	X	3/4	X	13/16	7/8

Size (mm)	23	24	25	26	27	28	29	30	32
Size (SAE)	X	15/16	1"	X	1_1/16	1_1/8	X	X	1_1/4

S-1271**Combination Stubby Spanners Elliptical Type
CRV Steel Chrome Plated**

Size (mm)	6	7	8	9	10	11	12
Size (SAE)	X	X	X	X	3/8	7/16	X

Size (mm)	13	14	15	16	17	18	19
Size (SAE)	1/2	9/16	X	5/8	11/16	X	3/4

S-1235**Combination Spanner Elliptical Type
CRV Steel Satin Finish**

Size (mm)	6	7	8	9	10	11	12	13
Size (SAE)	1/4	X	5/16	X	3/8	7/16	X	1/2

Size (mm)	14	15	16	17	18	19	20	21	22
Size (SAE)	9/16	X	5/8	11/16	X	3/4	X	13/16	7/8

Size (mm)	23	24	25	26	27	28	29	30	32
Size (SAE)	X	15/16	1"	X	1_1/16	1_1/8	X	X	1_1/4

**S-1272****Combination Spanner Drop Forged
Raised Panel**

Size (mm)	6	7	8	9	10	11	12	13
Size (SAE)	1/4	X	5/16	X	3/8	7/16	X	1/2

Size (mm)	14	15	16	17	18	19	20	21	22
Size (SAE)	9/16	X	5/8	11/16	X	3/4	X	13/16	7/8

Size (mm)	23	24	25	26	27	28	29	30	32
Size (SAE)	X	15/16	1"	X	1_1/16	1_1/8	X	X	1_1/4

S-1273**Combination Spanners Recessed Panel Drop Forged
(Also Available in CRV Material)**

Size (mm)	6	7	8	9	10	11	12	13	14
------------------	---	---	---	---	----	----	----	----	----

Size (mm)	15	16	17	18	19	20	21	22	23
------------------	----	----	----	----	----	----	----	----	----

Size (mm)	24	25	26	27	28	29	30	32
------------------	----	----	----	----	----	----	----	----



Hand Tools



S-1237

• Locking Grip Plier Drop Forged
• Size 7", 10"



S-1238

Water Pump Plier Box Type
Steel Or Carbon Steel 10", 12"
With Or Without Sleeve



S-1239

Water Pump Plier Groove Joint (channel Type)
10" - 12" With Or Without Sleeve



S-1240

Adjustable Wrench Drop Forged
Carbon Steel
Size : 8", 10", 12"



S-1241

Fence Plier Hammer Head
With Dip Sleeve
Size : 10"



S-1242

Top Cutter
SIZE : 6", 7", 8"




S-1243

Tower Pincer
Size : 8", 9", 10"
Also Available With Dip Sleeve



S-1244

Cobbler Pincer
Also Available With Dip Sleeve
Size : 6", 7", 8"

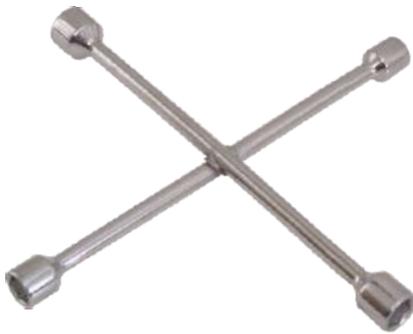

S-1245

Cross Wheel Spanner (Drop Forged)
(17x19x21x23mm, 17x19x22x24mm)
Chrome Plated Or Black Powder Coated



S-1246

Pipe Wrench Stillson Type
Drop Forged
Size : 8", 10, 12, 14, 18, 24, 36, 48



S-1245TW

2 Way Wheel Spanner
Size : 24x27, 27x30, 27x32, 27x33, 30x32, 30x33
Chrome Plated For Corrosion Resistance Or
Powder Coated Finish.



S-1240

Adjustable Wrench Drop Forged
Carbon Steel
Size : 8", 10", 12"



Hand Tools



S-1255

Bearing Puller Drop Forged (Two Leg)
Size : 3" - 4" - 6" - 8" - 10" - 12"



S-1256

Bearing Puller Drop Forged (Three Leg)
Size : 3" - 4" - 6" - 8" - 10" - 12"



S-1257

Letter & Figure Punch
Size : 1mm To 12mm



S-1260

Adjustable Tap & Reamer Wrench
Zinc Die Cast Body
Size : 1/4", 3/8", 1/2", 3/4" (2mm To 18mm)



S-1261

Die Holder For Round Dies
Dia Size : 20 X 5 To 38 X 14



S-1262

Center Punch Round Head
Size : 3" To 5"



Hand Tools



S-1263

Hollow Punches
Available Loose Or Set
Size : 2mm To 32mm



S-1264

Drive Pin Punches
Size (Inch) : 4-6-8 Long
Set Of 5 And 8 Pcs



S-1301

Heavy Duty Tow Bar Pin
Size : 16mm To 32mm



S-1302

Linch Pin With 'd' Ring
Size : 6mm, 8mm, 11mm



S-1303

Linch Pin With 'O' Ring
Size : 6mm, 8mm, 10mm, 11mm




S-1304

Linch Pin With Chain
Size : 6mm, 8mm, 10mm, 11mm



S-1305

Linch Pin 'D' Type
Size : 6mm, 8mm, 10mm, 11mm

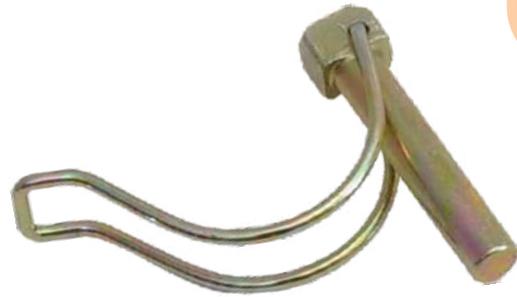

S-1306

Linch Pin Half Moon Type
Size : 6mm, 8mm, 10mm, 11mm



S-1307

R Pins
Size : 2mm To 8mm



S-1308

Tow Hitch Heavy Duty Ball And Pin



S-1247

Box Wrenches Zinc Plated Or
Powder Coated
Size 6x7mm To 30x32mm



S-DW1

Drum Wrench
(Aluminum Die Cast)

Infrastructure



Press Section



Pad Printing



VMC Station




CNC Station



Broaching Process



Spanner Forging

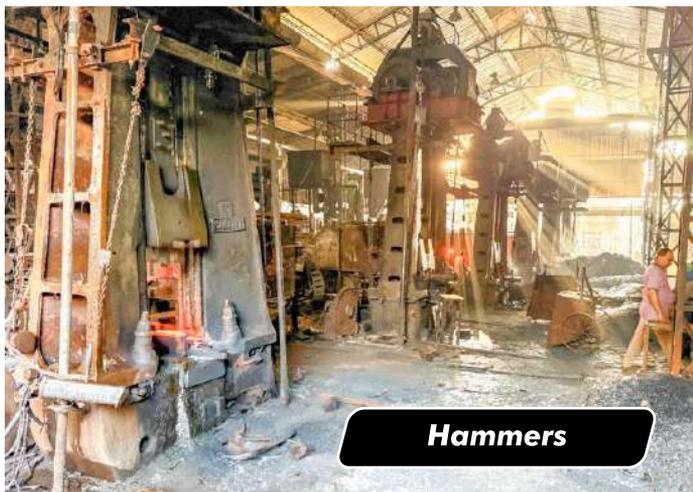

Hammers



Finished Goods




SAYAL IMPEX PVT. LTD.



Professional Series of Grease Guns

PRODUCT FEATURES

- Develops 6,000 PSI
- Variable stroke feature built in for use in confined areas
- High Tolerance Aluminum Die Cast Grease Gun Head

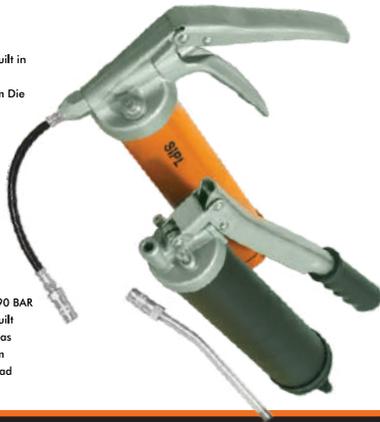

PRODUCT FEATURES

- Develops 10,000 PSI / 690 BAR
- Variable stroke feature built in for use in confined areas
- High Tolerance Aluminum Die Cast Grease Gun Head



Hand Tools



SAYAL IMPEX PVT. LTD

C-13, Phase-1, Focal Point, Ludhiana - 141010, INDIA

Tel. No. : +91-161-2674702, 5016568, 5016569

Mobile : +91-98156 15090

E-mail : rsayal90@gmail.com | sayalimpex@connectzone.in

Website : www.sayalimpex.com